INTERNATIONAL MARITIME ORGANIZATION

E

SUB-COMMITTEE ON NAVIGATION, COMMUNICATIONS AND SEARCH AND RESCUE
13th session
Agenda item 3

NCSR 13/3/3
20 March 2026
Original: ENGLISH
Pre-session public release: ☒

ROUTEING MEASURES AND SHIP REPORTING SYSTEMS

Amendments to the existing mandatory ship reporting system "In the Dover Strait/Pas De Calais" (CALDOVREP)

Submitted by France and United Kingdom

SUMMARY

Executive summary:	This document contains a proposal to amend the existing ship reporting system "In the Dover Strait/Pas De Calais" (CALDOVREP) adopted by resolution MSC.85(70), as amended by resolution MSC.251(83).
Strategic direction, if applicable:	7
Output:	7.22
Action to be taken:	Paragraph 22
Related documents:	Resolutions A.851(20), as amended, A.1158(32) and MSC.85(70), as amended by MSC.251(83); MSC/Circ.1060, as amended; MSC.1/Circ.1608; NCSR 12/3/3; NCSR 11/INF.8 and SN/Circ.167

Introduction

1 This document contains a proposal by France and the United Kingdom to amend the existing mandatory ship reporting system "In the Dover Strait/Pas De Calais" (CALDOVREP) (resolution MSC.85(70), annex 2, as amended by resolution MSC.251(83)).

2 The proposal was drafted based on close expert cooperation of the submitting Member States.

3 The annex contains the suggested amendments to the CALDOVREP system. All changes are shown using manual track changes applied to resolution MSC.85(70), annex 2, as amended by resolution MSC.251(83).

Summary

4 The amendment to the CALDOVREP system pertains to the information to be provided under designator X "miscellaneous", where details related to maritime insurance would be required. Making this additional information available will be of great value, particularly in relation to safety of life at sea, maritime safety, and the protection of the marine environment within the CALDOVREP operational area.

5 The existing CALDOVREP system was established more than 25 years ago based on the ship reporting requirements and coastal State capabilities available at the time of its adoption. Since then, significant advancements have been made in ship monitoring and maritime data exchange technologies. The proposed amendment to the CALDOVREP system aims to modernize the reporting procedure for ships as much as possible, and vessels will be supported in sharing maritime insurance information through the European Union Maritime Information and Exchange System (SafeSeaNet). Participation in the ship reporting system will be limited exclusively to States participating in the CALDOVREP system.

6 This submission does not request major changes to the current operational process of CALDOVREP. The United Kingdom will have access to the European Union Maritime Information and Exchange System (SafeSeaNet) before the effective date of implementation.

Marine environmental considerations

7 Ship reporting systems play a vital role in ensuring safety of life at sea, maritime safety, operational efficiency, and environmental protection. The increase in transport and the movement of hazardous cargoes such as oil elevate the risk of maritime incidents and potential environmental harm along the United Kingdom's and European coastlines. These circumstances highlight the necessity for verifying maritime insurance, as ships lacking adequate insurance represent a significant threat to both safety and environmental standards.

8 The International Conventions on Civil Liability for Oil Pollution Damage (1992), Bunker Oil Pollution Damage (2001), and Wreck Removal (2007) require ships in scope to carry Convention certificates from their flag State or another State Party confirming that there is sufficient insurance or other financial security in place capable of meeting the liability obligations imposed by the Conventions.

9 The maritime insurance requirements under designator X are directly connected to the safety and protection of the marine environment as part of the broader international framework for safety and pollution prevention. Flag States are responsible for ensuring that ships under their flags comply with statutory requirements, including insurance, which is necessary for transporting cargo such as dangerous or polluting goods. Failure to meet these requirements results in a violation of regulations and can disrupt the established system balance.

10 The proposed amendment would require vessels to provide evidence of insurance for maritime claims and civil liability certificates issued by the flag State. This measure aims to improve enforcement of marine safety and environmental protection while maintaining the rights of coastal States to seek legal remedies for damages. Without clear vessel ownership and insurance, these protections may fail, potentially leaving coastal States responsible for spill-related damages.

Communication required for the system

11 The communication requirement for implementing the new reporting requirement under designator X for Channel VTS and Gris Nez Traffic is a stable Internet connection enabling 24/7 access to the ship web user interface of the European Union Maritime Information and Exchange System (SafeSeaNet). This will be considered the primary method of reporting. Email can be used as a backup to the primary means of reporting.

12 The communication requirement for reporting requirements under other designators for Gris Nez Traffic is a stable Internet connection enabling 24/7 access to the ship web user interface of the European Union Maritime Information and Exchange System (SafeSeaNet). This will be considered the primary method of reporting or via the alternative means assigned by the competent shore-based authority.

13 The communication requirement for reporting requirements under other designators for Channel VTS is VHF voice communication. This will be considered the primary method of reporting or via the alternative means assigned by the competent shore-based authority.

Cooperation between States

14 France and the United Kingdom share significant common interests in this area. The CALDOVREP system was created in 1999, when France and the United Kingdom proposed to IMO the establishment and operation of a joint Vessel Traffic Service in the Dover Strait (CALDOVREP system). In order to harmonize the practices implemented by each vessel traffic service centre, Gris Nez Traffic in France and Channel VTS in the United Kingdom, a joint operational manual was introduced in 2019 and has just been updated in 2026. The operation of this joint vessel traffic service involves several working meetings to review progress and discuss any changes that may be needed based on operational feedback. Exchanges take place daily with close cooperation, and each centre is able to take over the other's respective tasks as needed and upon request.

Shore-based facilities to support the operation of the system

15 The shore-based facilities that support the operation of the system include the SafeSeaNet system, an integrated system of AIS base stations, VHF shore-based facilities, email, and other communication methods as specified in the annex. Support for legacy communication methods such as telex will be discontinued.

16 Government and shore-based facilities include personnel trained and certified according to applicable national and international regulations to support the operation of the proposed system.

17 Cyber risk management is implemented in compliance with national and international regulations and standards, including applicable data protection legislation.

Details regarding the appropriate procedures to follow in the event of a failure of the shore-based authority's communication facilities.

18 The system incorporates adequate redundancy measures to effectively address typical SafeSeaNet system failures.

Measures to be taken if a ship fails to comply

19 The primary aim of the system is to facilitate safe navigation and safeguard the marine environment by enabling the exchange of information between ships and shore authorities on insurance. Should a ship fail to submit required information under designator X and be positively identified, relevant details may be communicated to the appropriate flag State authorities for further investigation and potential prosecution in accordance with national legislation. Additionally, this information may be shared with port State control inspectors.

20 Concerning Convention certificates, such action will be undertaken solely when the flag State is a party to the applicable Conventions.

Relevant rules and regulations

21 The original resolution was adopted on 7 December 1998; therefore a review of the relevant CALDOVREP can be considered as a natural update to the system. The International Regulations for Preventing Collisions at Sea (COLREG) are applicable through the whole area covered by the system.

Action requested of the Sub-Committee

22 The Sub-Committee is invited to consider the proposed amendments to the mandatory ship reporting system "*In the Dover Strait/Pas De Calais*" (CALDOVREP), as set out in the annex, with a view to adoption by the Maritime Safety Committee with an effective date of implementation of six months after adoption.

***

ANNEX

DRAFT MSC RESOLUTION

ADOPTION OF AMENDEDMENTS TO THE MANDATORY SHIP REPORTING SYSTEM "IN THE DOVER STRAIT/PAS DE CALAIS" (CALDOVREP) (RESOLUTION MSC.85(70), ANNEX 2, AS AMENDED)

THE MARITIME SAFETY COMMITTEE,

RECALLING Article 28(b) of the Convention on the International Maritime Organization concerning the functions of the Committee,

RECALLING ALSO regulation V/11 of the International Convention for the Safety of Life at Sea, 1974 (SOLAS Convention), in relation to the adoption of ship reporting systems by the Organization,

RECALLING FURTHER resolution A.858(20) which authorizes the Committee to perform the function of adopting ship reporting systems on behalf of the Organization,

TAKING INTO ACCOUNT the *Guidelines and criteria for ship reporting systems* adopted by resolution MSC.433(98),

TAKING ALSO INTO ACCOUNT the *Guidelines for vessel traffic services* adopted by resolution A.1158(32),

HAVING CONSIDERED the recommendations of the Sub-Committee on Navigation, Communications and Search and Rescue at its […] session,

1 ADOPTS, in accordance with SOLAS regulation V/11, the revised mandatory ship reporting system *In the Dover Strait/Pas de Calais,* as set out in the annex to the present resolution;

2 DECIDES that the aforementioned mandatory ship reporting system will enter into force on [date (six months after the date of adoption)];

3 REQUESTS the Secretary-General to bring this resolution and its annex to the attention of Contracting Governments to the SOLAS Convention and to Members of the Organization; and

4 REVOKES annex 2 to resolution MSC.85(70) and section 3 of the annex to resolution MSC.251(83) as from 0000 hours UTC on [date].

ANNEX

DESCRIPTION OF THE MANDATORY SHIP-REPORTING SYSTEM ~~FOR THE~~ IN THE DOVER STRAIT/PAS DE CALAIS

1 Categories of ships required to participate in the system

Ships of 300 gross tonnage and over are required to participate in the system, in line with the MAREP, OUESSREP and MANCHEREP systems already in place.~~This threshold is the same as used in the existing voluntary MAREP scheme (SN/Circ.167, annex, page 4).~~

~~Within the coverage area, these arrangements replace the existing MAREP scheme for ships of 300 gross tonnage and over. However,~~ Additionally, ships of less than 300 gross tonnage should continue to make reports under the existing voluntary arrangements in circumstances where they:-

- ~~.~~ are "not under command" or at anchor in the TSS or its ITZs;
- ~~.~~ are "restricted in their ability to manoeuvre"; or,
- ~~.~~ have defective navigational aids.

The MAREP arrangements outside the coverage area of this system remain unchanged.

2 Geographical coverage of the system and the number and edition of the reference chart used for the delineation of the system

The system covers a 65 mile stretch of the Dover Strait/Pas de Calais and is bounded by a line to the east drawn from North Foreland to the border between France and Belgium; and by a line to the west drawn from the Royal Sovereign Light Tower, through the Bassurelle Light Buoy (at its assigned position of 50°32'.80 N, 000°57'.80 E) to the coast of France.

The reference charts are British Admiralty Charts 2449 (1998 edition, scale 1:150,000) and 2451 (1991 edition, scale 1:150,000), and also chart 7312 of the French Navy Hydrographic and Oceanographic Service (INT 1072) (1994 edition, scale 1:375000). Also relevant is the British Admiralty Chart 5500 *Mariners' Routeing Guide English Channel and Southern North Sea* and the French Navy Hydrographic and Oceanographic Service, 5HOM 8001 Chart - *Guide pour la préparation de la traversee de la Manche.*

The area of the reporting system is covered by modern hydrographic surveys and areas of unstable seabed are regularly resurveyed to ensure navigational safety.

3 Format and content of reports, times and geographical positions for submitting reports, authority to whom reports should be sent and available services

The reports required from ships entering the area covered by the system are position reports similar to the existing MAREP/POSREP arrangements as well as the provision of Convention certificates or an explanation as to why the vessel does not require insurance. The short title for the ship-report is CALDOVREP.

Reports should be made using a combination of VHF voice transmissions and a web interface (SafeSeaNet) before entering operational area as outlined in paragraph 3.3 ~~VHF voice transmissions~~. However, when reporting to ~~DOVER COASTGUARD~~ Channel VTS, ships can fulfil the reporting requirements of a CALDOVREP, except insurance information requirements under designator X, through the use of automatic ship identification transponders by the Organization.

A ship may elect, for reasons of commercial confidentiality, to communicate that section of the report which provides information on cargo by non-verbal means prior to entering the system.

For Gris Nez Traffic, the French coastal authority for north-bound traffic, all reporting requirement under all designators for the CALDOVREP should be done via the European Union Maritime Information and Exchange System (SafeSeaNet) as the primary method of reporting or via the alternative means assigned by the competent shore-based authority, as specified in paragraph 5.

For Channel VTS, the UK coastal authority for south-bound traffic, all reporting requirements under other designators for the CALDOVREP should continue to be done via VHF voice transmissions, except insurance information requirements under designator X as the primary method of reporting or via the alternative means assigned by the competent shore-based authority, as specified in paragraph 5.

Ships required to report into the CALDOVREP shall submit insurance information requirements under designator X by electronic means using the European Union Maritime Information and Exchange System (SafeSeaNet) as a primary means of reporting or via the alternative means assigned to the competent shore-based authority, as specified in paragraph 5. By using SafeSeaNet, ships will have access to information available about their ship and can reuse available information when creating a new report.

The SafeSeaNet web user interface can be accessed at https://caldovrep.emsa.europa.eu.[1]

The language used for communication shall be English, using the IMO Standard Marine Communication Phrases.

3.1 Format

The information given below is derived from the format-type given in paragraph 2 of the appendix to resolution A.851(20).

3.2 Content

A report from a ship to the shore-based authorities should contain the following information to achieve the objectives of the system:

A - Name of the ship, call sign, IMO identification number (or MMSI for reporting by transponder);

B - Date and Time;

C or D - Position in latitude and longitude or true bearing and distance from a clearly identified landmark;

[1] The interface will be activated when the measure is approved and in force.

E - True course;

F - Speed;

G - Port of departure;

I - Port of destination and expected time of arrival;

O - Present draught;

P - Cargo and, if dangerous goods are on board, IMO quantity and class;

Q and R - Defect, damage and/or deficiencies affecting ship's structure, cargo or equipment, or any other circumstance affecting normal navigation, in accordance with the SOLAS or MARPOL Conventions;

T - Address for provision of information concerning a cargo of dangerous goods;

W - Total number of persons on board

X - Miscellaneous:

- Navigation conditions;
- Estimated quantity of bunker fuel and characteristics for ships carrying over 5,000 tonnes bunker fuel;
- One or more Convention certificates of insurance issued by a party to the conventions and carried on board the ship, providing evidence of the existence of insurance for maritime claims, as well as civil liability certificates, as applicable, issued in accordance with:
  - the International Convention on Civil Liability for Oil Pollution Damage, 1992, as amended (1992 Civil Liability Convention);
  - the International Convention on Civil Liability for Bunker Oil Pollution Damage, 2001 (2001 Bunkers Convention); and
  - the Nairobi International Convention on the Removal of Wrecks, 2007 (2007 Nairobi WRC),

  where no Convention certificates are held, to provide an explanation as to why.

Note:

On receipt of a position message, the VTS operators will establish the relationship between the ship's position and the information supplied by the position fixing equipment available to them. Information on course and speed will help operators to identify one ship among a group of ships. This will be achieved automatically if a transponder is used.

3.3 Geographical position for submitting reports

North-east bound traffic should report to Gris Nez Traffic on the French coast 2 nautical miles before crossing the line from the Royal Sovereign light tower, through the Bassurelle Light Buoy (at its assigned position of 50°32'.8 N, 000°57'.8 E) to the coast of France.

South-west-bound traffic should report to the shore at ~~DOVER COASTGUARD~~Channel VTS on the English coast when within VHF range of North Foreland and not later when crossing the line drawn from North Foreland to the border between France and Belgium (appendix). Reporting requirements must be reported prior to entering the reporting area using the method of reporting assigned by the competent shore-based authorities as specified in paragraphs 3 and 5.~~, and not later than leaving the reporting area (Appendix).~~

The ship is required to submit information under designator X related to the insurance certificate by electronic means using the European Union Maritime Information and Exchange System (SafeSeaNet), as a primary means of reporting or via the alternative means assigned to the competent shore-based authority, as specified in paragraph 5. The competent shore-based authorities will distribute information related to insurance certificates to other authorities within the system.

Crossing Traffic

Reports to the nearer of the two shore stations should be made on departure from a port within the coverage area. Recognizing that cross-Channel ferries generally operate according to published schedules, special reporting arrangements can be made on a ship-by-ship basis, subject to the approval of **both** Gris Nez Traffic and ~~DOVER COASTGUARD~~Channel VTS.

Further reports should be made to the relevant shore station whenever there is a change of navigational circumstance, particularly in relation to items Q and R of the reporting format. If item X has been supplied on crossing into the reporting area, it does not need to be provided again.

3.4 Authority

The shore-based authorities are the Regional Centre for Surveillance and Rescue Operations, Cross Gris Nez (Call Sign: Gris Nez Traffic) - provided by the French Ministry with responsibility for maritime navigation, and the Maritime Rescue Coordination Centre, MRCC Dover (Call Sign: ~~DOVER COASTGUARD~~Channel VTS) - provided by HM Coastguard, which is part of the United Kingdom's Department for Transport~~Department of the Environment, Transport and the Regions.~~

Both Gris Nez and Dover sites monitor shipping in the TSS in the Dover Strait / Pas de Calais using radar and each provides regular information about weather and navigational hazards as part of the joint Channel ~~Navigation Information Service~~ Vessel Traffic Services (JCVTS ~~NIS~~). Information is broadcast at the following times and on the following frequencies:

Station	Frequency	Times	Additional broadcasts in times of poor visibility
Gris Nez (Call Sign: Gris Nez Traffic)	VHF Ch 79	H + 10	H + 25
Dover (Call Sign: Channel VTS ~~DOVER COASTGUARD~~)	VHF Ch 11	H + 40	H + 55

Information broadcasts will be preceded by an announcement on VHF Ch 16 and broadcasts from both stations will end with a reminder about the time of the next broadcast and the VHF frequency on which it will be made.

4 Information to be provided to participating ships

If necessary, individual information can be provided to a ship, particularly in relation to positioning and navigational assistance.

5 Radiocommunications requirements for the system, frequencies on which reports should be transmitted and information to be reported

The radiocommunications equipment required for the system is that defined in the GMDSS for Sea Area A1.

The ship reports can be made by using the European Union Maritime Information and Exchange System (SafeSeaNet) and by voice on VHF radio using Ch 13 (Gris Nez Traffic) or Ch 11 (~~DOVER COASTGUARD~~ Channel VTS).

Ship reports to ~~DOVER COASTGUARD~~ Channel VTS can alternatively be made by automatic ship-identification transponder, where available, using a suitably adapted DSC facility on VHF Ch 70, or equipment conforming to the standards adopted for the Universal AIS Transponder.

Confidential information may be transmitted by ~~other means~~ Channel VTS via channel.navigation@mcga.gov.uk and to Gris Nez Traffic via grisnezvts@mrccfr.eu.

6 Relevant rules and regulations in force in the area of the system

The International Regulations for Preventing Collisions at Sea 1972 (as amended) apply throughout the reporting area. In particular, rule 10 of those Regulations applies to the IMO-adopted TSS.

Ships carrying dangerous or hazardous cargoes and bound to or from any port within the proposed reporting area must comply with the European HAZMAT Directive (EC Directive 93/75).

In addition to these international requirements, the Joint Decree of the Préfét Maritime de l'Atlantique and the Préfét Maritime de la Manche et de la Mer du Nord (No. 92/97 - Brest, No. 03/97 Cherbourg) control navigation in the approaches to the French coast in the North Sea, the English Channel and the Atlantic in order to prevent accidental marine pollution. The Regulations make provision, in particular, for ships transporting hydrocarbons (MARPOL '73 Annex I), harmful liquid substances (MARPOL Annex II), noxious substances (MARPOL Annex III), dangerous goods (IMDG Code), preparing to pass through or remain in French territorial waters, to send an advance report to the appropriate CROSS five hours before entering territorial waters, or six hours before departure. The message sent to the CROSS must make clear the ship's intended movements in territorial waters and the status of its ability to manoeuvre and navigate.

The same Regulations require ships to monitor VHF Ch 16 or other specific frequencies in certain areas, and require the reporting of any accident within 50 miles of the French coast and the taking of any action required by the maritime authorities to reduce risks.

The United Kingdom has established a pollution control zone under the Merchant Shipping (Prevention of Pollution) (Limits) Regulations 1996. The proposed reporting area is included within those limits. Ships causing pollution within the area can be prosecuted and fined more than £250,000.

7 Shore-based facilities to support operation of the system

~~Dover Coastguard~~ Channel VTS

Channel VTS has access to radar, radiocommunications, VHF Direction Finding (DF), radio VHF Digital Selective Calling (DSC), and Automatic Identification System (AIS) facilities. Channel VTS supports the United Kingdom's HM Coastguard primary responsibilities of preserving safety of life at sea and co-ordinating responses to incidents.

~~The Channel Navigation Information Service (CNIS) has radar, an Information Processing and Retrieval System (IPRS), access to the United Kingdom's HM Coastguard operational radiocommunications, VHF Direction Finding (DF), radio VHF Digital Selective Calling (DSC), and Automatic Identification System (AIS) facilities. CNIS supports the primary responsibilities of preserving safety of life at sea and co-ordinating responses to incidents.~~

For the reporting of Convention certificates under designator X, the system's primary communication requirements include a reliable Internet connection to ensure continuous, 24/7 access to the vessel web user interface of the European Union Maritime Information and Exchange System (SafeSeaNet).

7.1 Channel VTS ~~CNIS~~ facility

The Channel VTS ~~CNIS~~ processing and display system receives inputs from the radar, AIS and VHF DF equipment, processes the information and presents it on any or all of ~~six~~ four displays. Each display shows processed images (tracks) from any of the three radar inputs overlaid on an electronic chart display system ~~synthetic map of a selected area~~. Sensor fusion combines both AIS and radar tracks together when within range, automatically displaying the position, course and speed information for all tracks. The system is capable of displaying information on a chart display for over 1,500 tracks and automatically pre-populating AIS information in the ship report database. ~~New targets entering radar range are automatically tagged with a unique track number. The position, course and speed information of up to 300 tracks is automatically updated and recorded, for each of the three radars, throughout the vessel's passage through the CNIS area, giving the CNIS a 900 track capability.~~

~~DOVER COASTGUARD~~ Channel VTS maintains a continuous watch on traffic in the Dover Strait/Pas de Calais. Operators can add vessel information to the associated ~~IPRS~~ database (such as name and cargo) and can display that supporting information on a separate screen. Channel VTS ~~CNIS~~ is capable of providing an automatic alarm to identify any track which strays into an unauthorized area. VHF DF vectors appear when a VHF radio transmits on the frequency selected on the VHF DF equipment Recording equipment automatically stores information from all tracks, which can ~~either~~ be replayed on the system. ~~or specific track movements can be plotted onto an A0 size sheet of paper.~~ Channel VTS ~~CNIS~~ operators have access to Lloyd's Register ~~and Hazardous Cargo data on a separate computer.~~

7.1.1 Radar facilities

Three surveillance radars cover the Channel VTS ~~CNIS~~ area and the area of the mandatory ship-reporting system. These are TERMA Dual X Band systems, each comprising main and back-up transceivers (type 232075) and a single antenna. The radars are located at:

.1 **Margate** - The antenna is 118 metres above mean ordnance datum and covers the area from the southern area of the North Sea to Dover;

.2 **Dover** - The antenna is 125 metres above mean ordnance datum and covers the area from North Foreland to Hastings; and,

.3 **Fairlight** - The antenna is 126 metres above mean ordnance datum and covers the area from Dover to the western boundary of the "Joint Channel VTS"~~CNIS~~ area (JCVTS).

Data from the Margate and Fairlight radars are transmitted to ~~DOVER COASTGUARD~~ Channel VTS via microwave links. The radars have a minimum operational range of 75 nautical miles, although the operational range of each radar is limited by radar video units to 35 nautical miles to prevent the track table from filling up with vessels which are not entering ~~the~~the JCVTS area. ~~CNIS area.~~

7.1.2 VHF DF facilities

JCVTS ~~CNIS~~ automatically displays vectors generated from the DF systems at Dover, Fairlight, North Foreland, St. Frieux and Cap Gris Nez. All of the DF systems may be set to one of a number of the VHF channels used in the area. In parallel, Channel 16 receivers monitor the distress channel, should a distress call be sent.

7.1.3 Radiocommunication facilities

Radiocommunications terminals are sited in the consoles of the MRCC Dover Operations Room. VHF radio receivers are located at Dover, while their associated transmitters are at West Hougham (near Folkestone) to gain optimum coverage of 13 VHF channels. MF is also fitted at Dover. Other VHF Transmitters are fitted at Fairlight and North Foreland radio sites and are controlled via landlines. The VHF channels used are:

.1 VHF Air (AM) on 132.65 MHz

.2 Ch 0 (SAR);

.3 Ch 6 (inter ship / scene of search for SAR);

.4 Ch 9 (pilotage) - receive only;

.5 Ch 10 (counter pollution);

.6 Ch 11 (~~port operations and CNIS~~ Channel VTS) – continuously monitored;

.7 Ch 12 (Thames port control) - receive only;

.8 Ch 13 (inter ship and port operations);

.9 Ch 14 (Thames port control) -receive only;

.10 Ch 16 (international distress) - continuously monitored;

.11 Ch 30 (special operations);

.12 Ch 67 (small ship safety) - secondary SAR;

.13 Ch 69 (inter ship, port operations and JCVTS~~CNIS~~);

.14 Ch 73 (Ch 0 back up);

.15 Ch 74 (Dover port control);

.16 Ch 80 (marinas);

.17 Ch 99 (Coastguard private channel).

7.1.4 VHF DSC facilities

A VHF Ch 70 digital calling system has been installed as part of the GMDSS requirement. Its purpose is to provide rapid distress alerting between vessels and the shore, routine calling of vessels and AIS facilities. DSC communications are available to all operator positions at ~~DOVER COASTGUARD and~~ Channel VTS. DSC takes priority over all other operations.

7.1.5 AIS facilities

~~DOVER COASTGUARD~~ Channel VTS can interrogate ships fitted with transponders to gain information on their identity and position. This information is displayed as an icon on an electronic charting package covering the JCVTS ~~CNIS~~ service area.

7.2 GRIS NEZ TRAFFIC

Similar facilities to those at ~~DOVER COASTGUARD~~ Channel VTS are also available at Gris Nez Traffic. The two centres act in partnership in the operation of the ~~CNIS~~Joint Channel VTS. Gris Nez Traffic specifically has the following facilities.

7.2.1 Radar facilities

Gris Nez Traffic is equipped with two radar installations at:-

.1 Cap Gris Nez; and

.2 Mont St. Frieux.

The two radar installations are linked to a single processing system, giving a complete visual display of the area covered.

7.2.2 Particular features

The system at Gris Nez Traffic allows the simultaneous monitoring of 1,000 tracks, which can be recorded and saved for up to a year. Advanced functions include alarms signalling risk scenarios, the identification of tracks infringing rule 10 of the COLREG, the monitoring of ships which make abrupt changes of course and speed, the observation of ships entering prohibited areas, and the monitoring of ships at anchor. All situations can be recorded, archived, and replayed either on-screen or in the form of a print out.

7.2.3 Radiocommunication facilities

Cross Gris Nez is equipped with 4 VHF radio installations, allowing coverage of the whole of the reporting area. Each station can send or receive on:

.1 VHF DSC Ch 70 (continuously monitored)

.2 Ch 16 (continuously monitored)

.3 Ch 13 (on which ships are requested to send their reports - again, continuously monitored)

One station (Cap Gris Nez) has facilities to send and receive information on MF, both through radiotelegraphy and DSC on a frequency of 2187.5 kHz, which is continually monitored.

7.2.4 Direction finding equipment

Gris Nez Traffic is equipped with 2 VHF radio direction finders installed at Cap Gris Nez and Mont St. Frieux, allowing VHF calls to be located precisely. Each installation can monitor 2 frequencies simultaneously within an accuracy of 0.5°.

7.2.5 Personnel

Both ~~DOVER COASTGUARD~~ Channel VTS and Gris Nez Traffic are staffed by personnel fully qualified and certified in Vessel Traffic Services to IALA recommendations. ~~experienced in the management of ship reporting systems.~~

8 Alternative communication if the shore-based facilities fail

JCVTS~~CNIS~~ is designed with sufficient system redundancy to cope with normal equipment failure. Radars have dual transmitter/receivers controlled either from MRCC DOVER or the radar site.

Radiocommunications are controlled at the MRCC. In the event of a failure there, each transmitter/receiver can be operated from the radar site. Limited coverage can also be achieved using emergency 25W transceivers, or 5W portable radios at Dover Coastguard. If JCVTS~~CNIS~~ operations are jeopardized at either Dover Coastguard or Gris Nez Traffic, then the other site can assume total control.

9 Measures to be taken if a ship fails to comply with the requirements of the system

The primary objective of the system is to facilitate the exchange of information between the ship and the shore and so support safe navigation and the protection of the marine environment. All means will be used to encourage and promote the full participation of ships required to submit reports under SOLAS regulation V/11. If reports are not submitted and the offending ship can be positively identified, then information will be passed to the relevant flag State authorities for investigation and possible prosecution in accordance with national legislation. Information will also be made available to port State control inspectors.

SUMMARY

1 Categories of ships to report

All ships of 300 gross tonnage and over.

2 When and where to report

North-east bound traffic: Gris Nez Traffic on the French coast 2 nautical miles before crossing the line from the Royal Sovereign Light Tower, through the Bassurelle Buoy (at its assigned position of 50°32'.80 N, 000°57'.80 E) to the French coast.

South-west bound traffic: ~~DOVER COASTGUARD~~ Channel VTS on the English coast when within VHF range of North Foreland, and not later than when crossing the line drawn from North Foreland to the border between France and Belgium.

Report to the nearer of the two shore stations on departure from a port **within the area covered**.

Information requirement under designator X related to insurance certificate must be reported through the European Union Maritime Information and Exchange System (SafeSeaNet) prior the entering area, and not later than leaving the reporting area (appendix).

3 How to report

By using the European Union Maritime Information and Exchange System (SafeSeaNet) and voice on VHF radio using Ch 13 (GRIS NEZ TRAFFIC) or Ch 11 (~~DOVER COASTGUARD~~ Channel VTS).

~~Alternatively to DOVER COASTGUARD by automatic ship-identification transponder, or using equipment conforming to the standards adopted for the Universal AIS Transponder.~~ Confidential information may be transmitted by ~~other means~~ email to Channel VTS: channel.navigation@mcga.gov.uk and Gris Nez Traffic: grisnezvts@mrccfr.eu

Information requirement under designator X related to insurance certificate shall be submitted by electronic means using the European Union Maritime Information and Exchange System (SafeSeaNet).

The SafeSeaNet web user interface can be accessed at: https://caldovrep.emsa.europa.eu.[2]

Reporting for CALDOVREP under all other designators (except insurance certificates) continue to be done through VHF voice transmissions to Channel VTS.

4 Reporting format

A - Name of the ship, call sign, IMO identification number (or MMSI for reporting by transponder);

B - Date and time;

[2] The interface will be activated when the measure is approved and in force.

C or D - Position in latitude and longitude or true bearing and distance from a clearly identified landmark;

E - True course;

F - Speed;

G -Port of departure;

I - Port of destination and expected time of arrival;

O - Present draught;

P - Cargo and, if dangerous goods are on board, IMO quantity and class;

Q and R - Defect, damage and/or deficiencies affecting ship's structure, cargo or equipment, or any other circumstance affecting normal navigation, in accordance with the SOLAS or MARPOL Conventions;

T - Address for provision of information concerning a cargo of dangerous goods;

W - Total number of persons on board

X - Miscellaneous:

- Navigation conditions;

- Estimated quantity of bunker fuel and characteristics for ships carrying over 5,000 tonnes bunker fuel;

- One or more Convention certificates of insurance issued by a party to the conventions and carried on board the ship, providing evidence of the existence of insurance for maritime claims, as well as civil liability certificates, as applicable, issued in accordance with:

  - the International Convention on Civil Liability for Oil Pollution Damage, 1992 (1992 Civil Liability Convention);

  - the International Convention on Civil Liability for Bunker Oil Pollution Damage, 2001 (2001 Bunkers Convention); and,

  - the Nairobi International Convention on the Removal of Wrecks, 2007 (2007 Nairobi WRC),

  where no Convention certificates are held, to provide an explanation as to why.

Appendix

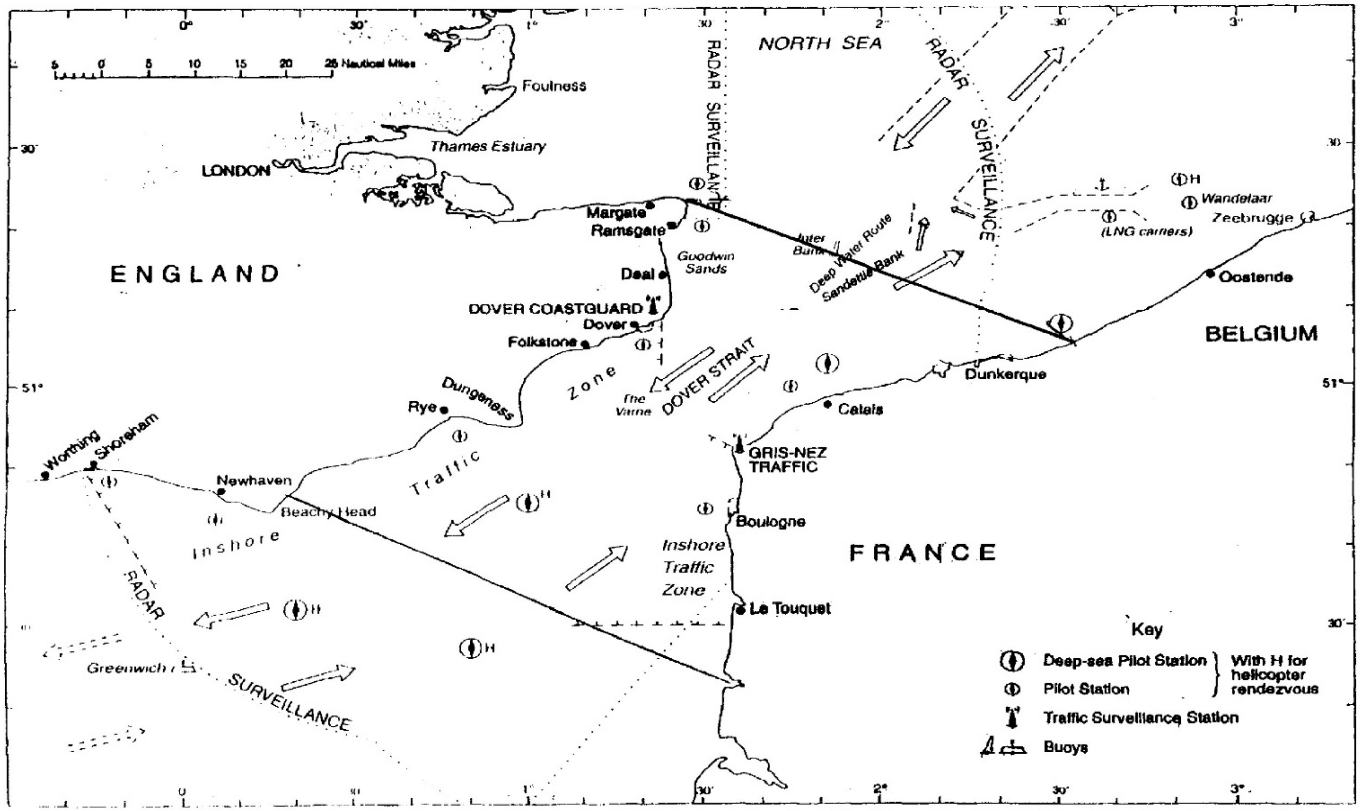

English Channel to North Sea, from Shoreham to Zeebrugge